
Intrinsic Certification:

Class I, II, III Division 1 GRPS A-G T4 Class I, Zone 0 AEx ia op is IIC T4 Ga Zone 20 AEx ia op is IIC T135C Da II 1 G Ex ia op is IIC T4 Ga II 1 D Ex ia op is IIC T135C Da SGSNA24ATEX020901X IECEx SNA 23.0001X



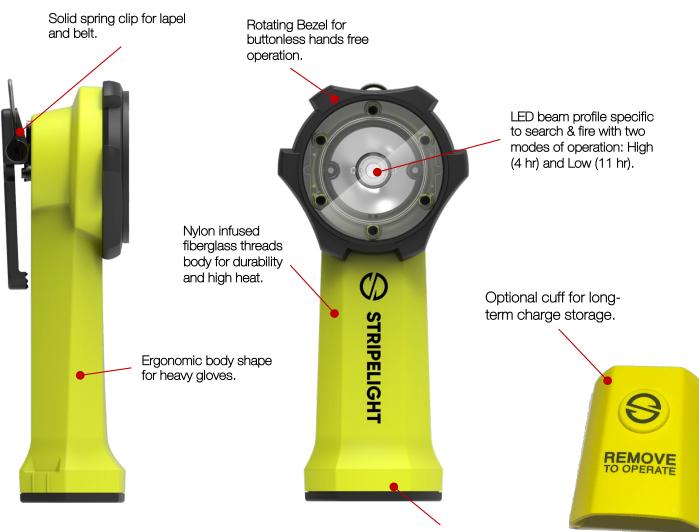

In inductive charging, no electrodes.

The Stripelight FRT FS Model is a handheld fire, rescue, and tactical (FRT) intrinsic safe flashlight for HazLoc US/Canada and Atex/IECEx certifications. It provides a LED light source with two modes: High and Low. LED light bundle is specially designed for fire as well as search. The projected light combines focused center pipe beam with a surrounding beam for search without a halo ring. The color temperature has been selected for best reading smoke and its density. The FRT FS designed for ergonomic hands-free switching and wireless charging.

Measure	LED High	LED Low
Output:	300 Lumens	~100 Lumens
Runtime:	4.5h	19h
Distance:	400m	200m
Intensity:	50,000cd	15,000cd
Waterproof:	IP67	IP67
Impact Resistance:	2-meter	2-Meter

